

# BRI Card (PCI/PCIe)

## Overview


Certified by ELASTIX™, our BRI card uses the same Cologne™ chipset as all the other manufacturers, yet costs less. It supports the EURO and US flavor ISDN (2B+D) circuits. Easy jumper settings allows for either ISDN lines or phones to be connected to the cards 2 or 4 ports.

## Features

- 64 ms tail line echo cancellation powered by Octassic™
- 2 or 4 BRI ports interface
- Up to 8 simultaneous voice calls over 4 ISDN BRI lines
- Independently configure each port for TE or NT
- Conference bridge
- Onboard power feeding
- 4 independent RJ45 interfaces
- Point-to-point (TE/NT) and point-to-multipoint (TE/NT)
- Euro ISDN protocol stack
- Fully PCI 2.2/PCIe compliant
- Compatible with 5V and 3.3V PCI busses automatically detectable
- DTMF detection on all B-channels

## Minimum Hardware Requirement

- Dual Core Processor
- 2GB RAM
- Available PCI/PCI-e Slot

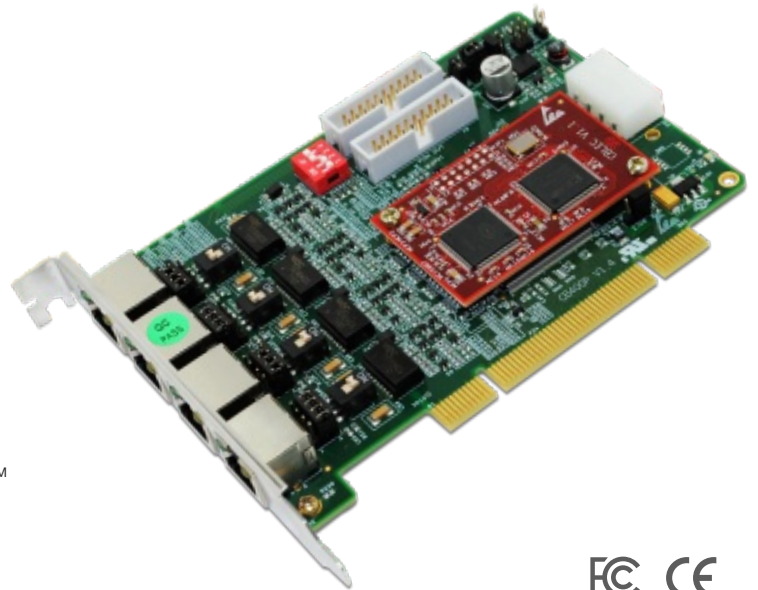

Certified by



Also works with



### Product Models

<b>aCB2</b> - 2 PORT BRI PCI card	<b>aCB4</b> - 4 PORT BRI PCI card
<b>aCB2e</b> - 2 PORT BRI PCIe card	<b>aCB4e</b> - 4 PORT BRI PCIe card
<b>aCB2eL</b> - 2 PORT BRI PCIe card + LEC	<b>aCB4eL</b> - 4 PORT BRI PCIe card + LEC
<b>aCB2L</b> - 2 PORT BRI PCI Card + LEC	<b>aCB4L</b> - 4 PORT BRI PCI card + LEC

Operation temperature: 0°C to 50°C  
Storage Temperature: -40°C to 125°C  
Dimensions: 15.4cm x 8.7cm x 1.8cm  
Weight: 102g\*

### Warranty Info

**5 Years** Hardware warranty.



ADRASH ECO PLACE, #176, Ground Floor, EPIP INDUSTRIAL Area, Whitefield, Bangalore-66, India.

✉ [globalsales@cem-solutions.net](mailto:globalsales@cem-solutions.net) / [indiasales@cem-solutions.net](mailto:indiasales@cem-solutions.net)

☎ +91 80 67080808