

Analog Active Card (FXO/FXS)

Quick Installation Guide

Quick Installation Guide


Analog Active Card

Version 2.1

Table of Contents

Hardware Setup.....	1
Installation Steps (For Windows OS).....	2

Hardware Setup

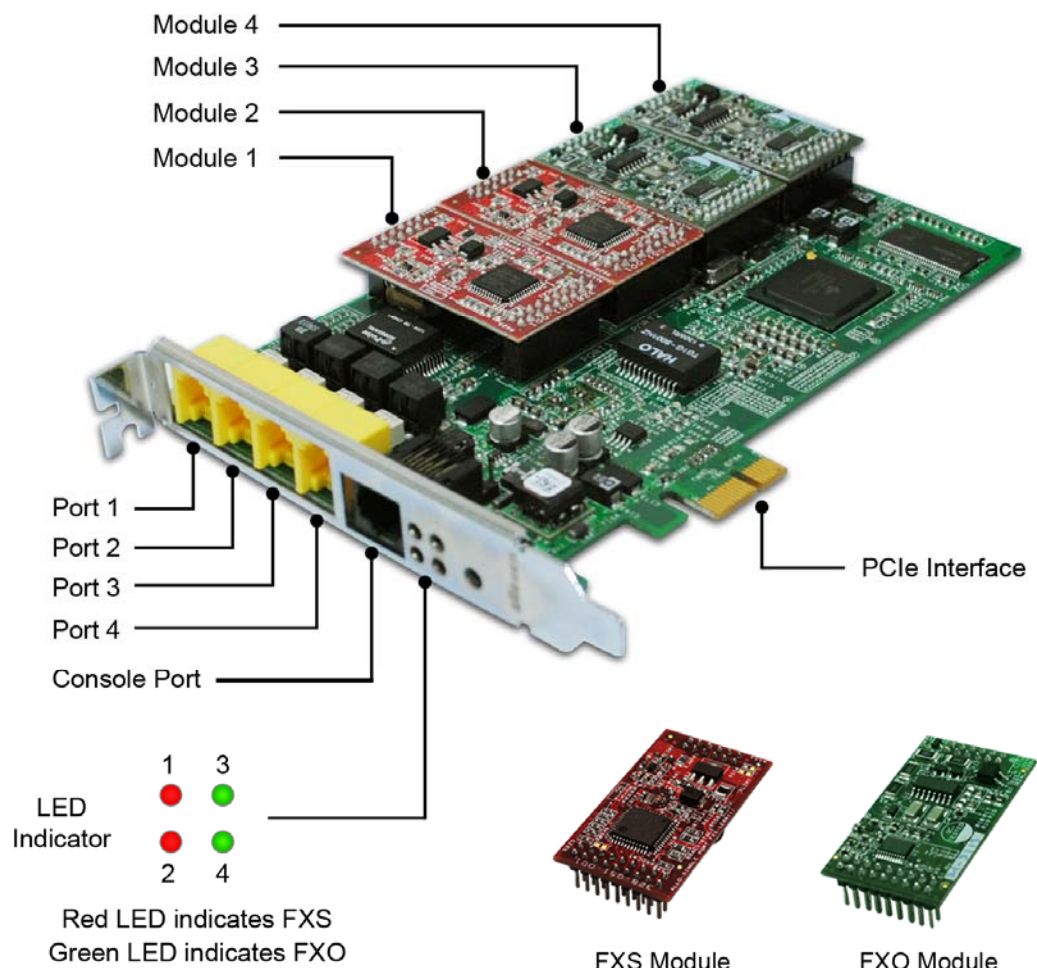

System Requirement:

- Operating System : Windows XP/ Windows 7/ Windows Server 200X
- 3CX phone system 10 and above
- Dual Core Processor with 1 GB RAM
- Available PCIe slot

Installation Steps (For Windows OS)

- 1) Place the Analog PCIe card in your computer PCIe slot and power-up the machine.
- 2) The operating-system will detect the Analog card as a new network card
- 3) If the Broadcom drivers are not preinstalled in the server, Download the Broadcom Network Drivers from https://www.broadcom.com/support/ethernet_nic/netxtreme_desktop.php as per the Windows OS Architecture (32 bit & 64 Bit)
- 4) Follow the on screen steps to install the Broadcom driver. After the successful installation follow the steps
- 5) Go to network connection of your PC (Control Panel → Network Settings) and you will find Broadcom network interface. Select both network interface's PC's and Broadcom Network Interface (Ctrl+ click on the icon)
- 6) Right click and select "bridge Connection" to bridge machine network interface and Broadcom network interface. This will create "bridged" network interface. Assign static IP address in the range of 192.168.113.x to the bridged interface. (Default IP Address of Broadcom Network Interface is 192.168.113.252)
- 7) Disable and enable the bridged interface.
- 8) Open Mozilla web browser with URI 192.168.113.252:8088.
Username: admin Password: admin

Important Note:

1. Use Mozilla Firefox browser only!
2. Don't assign 192.168.113.252 ipaddress to the bridged interface, since Broadcom network module will be assigned 192.168.113.252 by default.

11) It will lead to FXO/FXS card WebGUI, where you can configure the necessary configuration such as Trunks and Call routing rules and more.

12) In the WEB GUI go to General Settings → Network Settings → Change the IP address to DHCP or Static according to your network setup. Click Save and Apply Changes.

For Example: If your Office network is in 192.168.0.X series, Set the IP address of the card to 192.168.0.100. So that you can access the Web GUI through

<http://192.168.0.100:8088>

Username: admin

Password: admin

13) Go to “Control Panel→ Network Settings” of your PC and set the bridged network IP Address according to your network setup.

For Example: If your Office network is in 192.168.0.X series, set the Bridged IP address to 192.168.0.200. This will become the Host machine IP address.

14) You can check the ipaddress of the Card by connecting analog phone to FXS port of the analog active card and press **.

Important Note:

If all the ports are FXO, we recommend assigning the IP address statically.

If you face any issues, please contact the reseller from whom you have purchased the CEM product or submit a support ticket <http://support.allo.com/>

You can access the Analog card Knowledgebase: <http://support.allo.com/KB/Category/19-fxsfxo-cardsgateway>

Thank You for choosing Allo.Com!